

Crash Test according to ISO 7176-19

Wheeled mobility devices for use in motor vehicles

This report serves solely as documentation for the test results. The tested objects have been selected by the client with out the assistance of Dahl Engineering.

Assignment:	Crash testing of wheel chair and WTORS according to ISO 7176-19 annex A and B
Date of testing:	6 th December 2006
Test object:	Minicrosser 1103 Ultra
Serial no:	not informed – (proto type)
WTORS:	Dahl / Safeguard, that meet requirements set our in clause 4.1 Wheelchair restraint – 4 p. retractors system fitted with 2 additional retractors on rear end of wheel chair (6 pcs. in total) Occupant restraint -3p. static shoulder and lap belts
Test dummy:	The test was carried out using a Hybrid II 50% dummy with mass of 76 Kg.
Measuring:	The deceleration was measured by accelerometers mounted on the crash test sled.
Photografi:	The test was filmed with a high speed camera at 500 fps. Still pictures, pre and post test, was also taken.

Test results

Sled deceleration and speed

See annex page with plotted graph and speed
Test no. 2006-089

Section	Details	X if correct
5.21	During the test	
(a)	Horizontal excursion limits	
	Wheelchair point P \leq 200 mm [Xwc]	73
	ADT knee \leq 375 mm[Xknee]	218
	ADT front of head \leq 650 mm [XheadF]	249
	ADT rear of head \leq 400 [XheadR]	312
(b)	The knee excursion exceeded the wheelchair P point excursion	X
(c)	(Batteries on powered wheelchairs) did not move completely outside the wheelchair footprint or move into the wheelchair user's space or contact with ADT legs	X
5.2.2	After the test	
(a)	The wheelchair remained in an upright position on the platform	X
	The ADT remained in the wheelchair with its torso at an angle of not more than 45° to the vertical, when viewed from any direction	X
(b)	There were no visible signs of material failure on the wheelchair securing points	X
(c)	There were no components, fragments or accessories of the wheelchair with a mass of more than 100g that completely separated from the wheelchair	X
(d)	There were no fragmented or separated component, that may contact the occupant, produced with sharp edges less than radius 2 mm	X
(e)	There were no visible signs of failure on the wheelchairs primary load carrying components	X
(f)	There were no visible signs of failure on the wheelchairs seat adjusters	X
(g)	The ADT was removed from the wheelchair without the use of tools	X
(h)	The wheelchair was released from the tie-down system without the use of tools	X
(i)	The post test decrease of the mean H-point height is not more than 20%	X

The presented samples meet the requirements set out in the ISO standard 7176-19.

Test Laboratory:

Dahl Engineering - Research and Testing Laboratory

Løvevej 3 - DK-7700 Thisted - Denmark

Phone: 45 96180077 - Fax: 45 96180078

e-mail: Dahl@dahlengineering.dk – web page: www.dahlengineering.dk

Thisted December 6th 2006

Claus Dahl Pedersen

Head of test laboratory

Test Report no: 06122006 Minicrosser




Test object: Minicrosser 1103 Ultra

Manufacturer: Medema Danmark A/S /Minicrosser -Enggårdvej 7, Snejbjerg 7400 Herning

Page 3 of 4

Annexes: 1. page with speed and deceleration pulse

Pre- test photo's

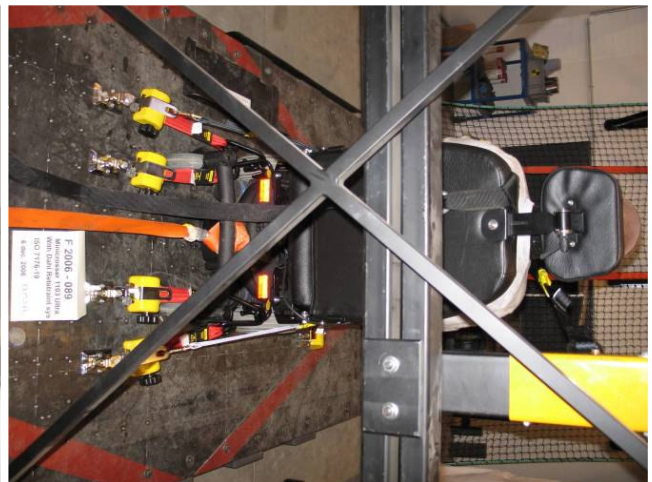

Test Report no: 06122006 Minicrosser



Test object: Minicrosser 1103 Ultra

Manufacturer: Medema Danmark A/S /Minicrosser -Enggårdvej 7, Snejbjerg 7400 Herning

Page 4 of 4

Post test photo's

